

RESCUEHUB TC065

Evacuation in all circumstances



TC065



Lightweight and ergonomic

- Easy & ready to use rescue system
- Compact and balanced

Easy evacuation

- Two-way system
- Optimised balance for active or passive evacuation

Comes with a waterproof bag

- Protects the rope during use or storage

Rope

- Max length: 500m
- 9.6mm braided rope

Hollow steering wheel

- Makes it easier for the rescuer to grip the steering wheel and manipulate it (to control the descent)



Option: motorisation

- For lifting the victim, with drill to minimise evacuation time

Automatic magnetic brake and rope lock

- Speed of descent: 1m/s 85 kg ; 1.5m/s 170 kg
- Quick to get started
- Facilitates the descent of the rescuer (smooth and automatic descent)
- Rope lock: highly intuitive rope lock to secure the rescuer's position

Aluminium connectors AM030

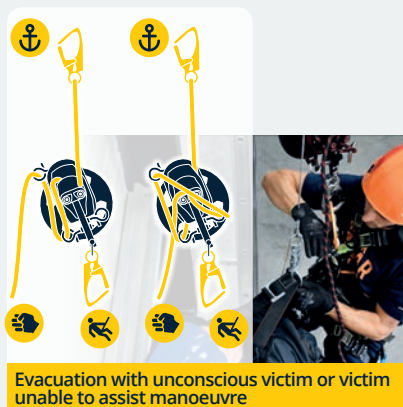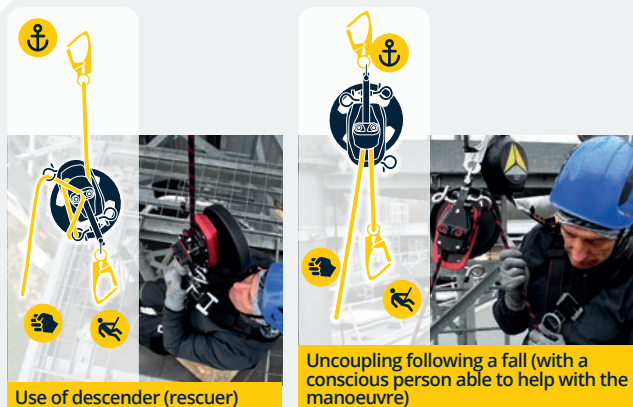

CE EN341:2011 -1A / EN1496:2017 -B / EN12841: TYPE C
 - Certified for 2 people
 - Max. load: 225 kg/ Min. load: 30 kg

